


PVC universal hoses

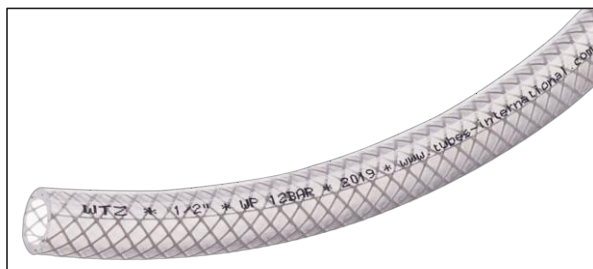

WTZ

Braid-reinforced general purpose PVC hose

Inner layer: transparent PVC

Reinforcement: Polyester braid

Outer layer: transparent PVC

Operating temperature: -5°C to +50°C

(working pressure dependent on temperature)

A lightweight, flexible, popular general purpose PVC hose. Used for air, water and light chemicals in industry, agriculture, horticulture and domestic use.

index	internal diameter [mm]	external diameter [mm]	wall thickness [mm]	working pressure 20°C [bar]	20°C burst pressure [bar]	Roll length [m]
PR-WTZ-08	8	12,5	2,25	15	45	60
PR-WTZ-10	10	14,5	2,25	10	30	60
PR-WTZ-12	12,5	17	2,25	12	35	60

Note: indexes highlighted in colour - most commonly used

Temperature dependence of burst pressure and working pressure for typical PVC hoses	temperature	20°C	30°C	40°C	50°C	60°C	70°C
	pressure	100%	74%	55%	40%	30%	22%



WTZ / P

WTZ hose with quick-release couplings, L=10 or

15 m Inner layer: transparent PVC

Reinforcement: Polyester braid

Outer layer: transparent PVC

Operating temperature: -5°C to +50°C

(temperature-dependent operating pressure)

Pneumatic extender - ready-made air hose made from WTZ hose. Terminated with a brass socket and Eurostandard DN7.2 plug. The simplest solution for connecting pneumatic tools.

index	internal diameter [mm]	external diameter [mm]	working pressure 20°C [bar]	20°C burst pressure [bar]	cable length [m]	cable weight [kg]
PR-WTZ-P-10-10	10	14,5	10	30	10	1,225
PR-WTZ-P-10-15	10	14,5	10	30	15	1,785

Note: indexes highlighted in colour - most commonly used

Temperature dependence of burst pressure and working pressure for typical PVC hoses	temperature	20°C	30°C	40°C	50°C	60°C	70°C
	pressure	100%	74%	55%	40%	30%	22%



Pneumatic extensions - prefabricated compressed air hoses, are terminated with the popular DN 7.2 Eurostandard quick couplings, which fit many pneumatic tools, including: air guns, wheel pump guns, air spanners.