


Steam guns

Steam guns in combination with flexible steam hoses are used for effective cleaning of equipment in many types of industry: chemical, petrochemical, energy, food, cosmetics and pharmaceutical. It is important to remember that manual operation with a steam gun requires a safety risk analysis and appropriate operator clothing to protect the entire body from possible steam or hot water ejaculation.

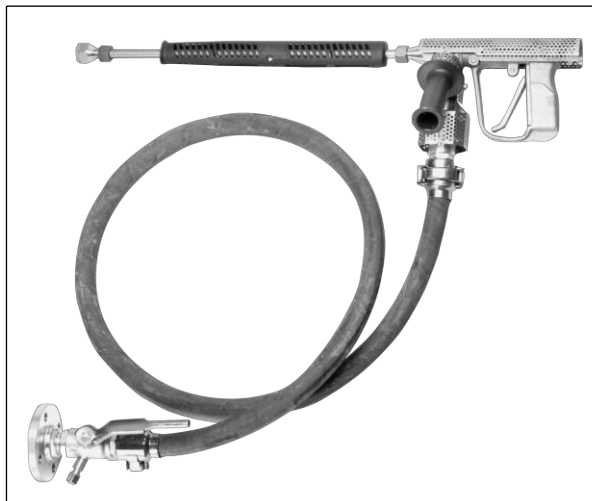

WEINHOLD® DP10

Steam cleaning gun

Material:	stainless steel (main components) heat-resistant plastic
Sealing:	PTFE with glass fibre
Operating pressure:	10 bar
Operating temperature:	up to +180°C (temporarily +210°C)

High-quality steam gun that meets the safety requirements for working with steam. Equipped with a swivel hose connection. Available with a wide range of accessories - different types of lances and nozzles. Used for washing and steam cleaning of appliances, equipment, floors, de-icing of outdoor equipment.

Steam flowing into the gun via a hose is diverted inside the gun to a shut-off valve before flowing out through the lance and nozzle. The ergonomically designed trigger reduces the opening force of the valve. Releasing the trigger automatically cuts off the steam supply, preventing unwanted steam flow and possible accidents. The special thermal insulation of the gun and lance (perforated stainless steel cover on bridges made of heat-resistant plastic) eliminates the risk of burns. The gun handle can be easily converted to the other side for left-handed operation. An additional handle mounted on the front of the lance is possible. The gun is fitted with a swivel coupling as standard, which prevents the hose from twisting during operation. The gun is often used together with a specialised steam valve - available on request. Selection of gun configuration in contact with Tubes International.

WH-DP10 Steam gun with swivel joint, GW 1/2" BSP (hose connection)	WH-DP10-JP-0500 L = 500 mm WH-DP10-JP-1000 L = 1000 mm WH-DP10-JP-1500 L = 1500 mm Lance for steam	WH-DP10-HC-21 Lance holder with clamp WH-DP10-H-22 Handle
	WH-DP10-CN-06 Ø = 6 mm WH-DP10-CN-08 Ø = 8 mm Circular nozzle	WH-DP10-MN-180-100 180° multi-hole nozzle 2 x 5 Ø2 holes, L = 100 mm
	WH-DP10-FN-30 α = 30° WH-DP10-FN-60 α = 60° WH-DP10-FN-90 α = 90° Flat nozzle	Rotating nozzle (on request)