

MACHINES AND ACCESSORIES - protection and sealing




GT 35

Material: Polyester
Working temp.: Up to +100°C

Protective sleeve made of extremely dense polyester fabric. Designed for single hose or hose assembly bundle protection in hydraulic or pneumatic applications. Good resistance to mechanical impact, oils and organic products. Protects the hose and safeguards its operator in case of oil burst caused by hose bursting.

code	I.D. [mm]	width [mm]	weight [kg/m]	standard length [m]
ZC-GT-035	20	35	0.027	100
ZC-GT-040	22	40	0.032	100
ZC-GT-045	25	45	0.034	100
ZC-GT-050	28	50	0.038	100
ZC-GT-055	32	55	0.042	100
ZC-GT-060	35	60	0.045	100
ZC-GT-065	38	65	0.048	100
ZC-GT-080	45	80	0.060	100
ZC-GT-090	50	90	0.065	100
ZC-GT-120	70	120	0.096	100
ZC-GT-150	90	150	0.112	100

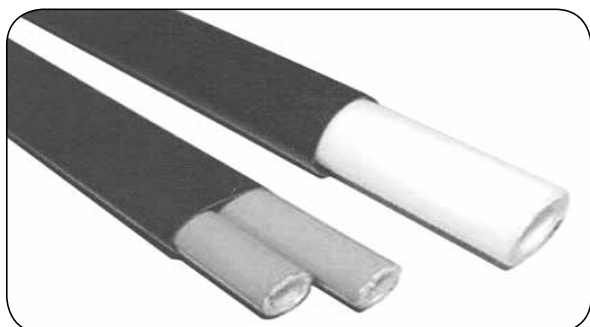

GPVC

Material: PVC
Working temp.: Up to +70°C

Protective sleeve made of PVC. Designed for single hose or hose assembly bundle protection in hydraulic or pneumatic applications. Protects the hose and safeguards its operator in case of oil burst caused by hose bursting.

code	I.D. [mm]	wall thickness [mm]	weight [kg/m]	standard length [m]
ZC-GPVC-10	10	0.5	0.026	150
ZC-GPVC-16	16	0.5	0.039	100
ZC-GPVC-20	20	0.6	0.058	100
ZC-GPVC-22	22	0.6	0.063	100
ZC-GPVC-25	25	0.6	0.072	100
ZC-GPVC-25S	25	1.5	0.157	100
ZC-GPVC-28	28	0.6	0.082	100
ZC-GPVC-30	30	0.6	0.087	50
ZC-GPVC-30S	30	1.5	0.187	50
ZC-GPVC-33	33	0.7	0.104	50
ZC-GPVC-33S	33	1.5	0.218	50
ZC-GPVC-38	38	0.7	0.135	50
ZC-GPVC-38S	38	1.5	0.285	50
ZC-GPVC-40	40	0.7	0.141	50
ZC-GPVC-45	45	0.7	0.144	50
ZC-GPVC-50	50	0.7	0.167	50
ZC-GPVC-55	55	0.7	0.184	50